


Installation Guide

Connection of AV Adapter and Controller Cable

Hold the cable , align the side of jack marked with \Rightarrow on the female 13-pin connector with the male 13-pin connector marked with \Leftarrow then firmly plug together.



- ① Black 4 pin male for Camera1.
- ② Black 4 pin male for Camera 2.
- ③ Black 4 pin male for Camera 3.
- ④ Single red wire for power wire of DC / 12-32V.
- ⑤ Single black wire for GND.
- ⑥ Single brown wire to positive power wire of the back-up light.
- ⑦ Single white wire to positive power wire of left Light .
- ⑧ Single blue wire to positive power wire of right light .

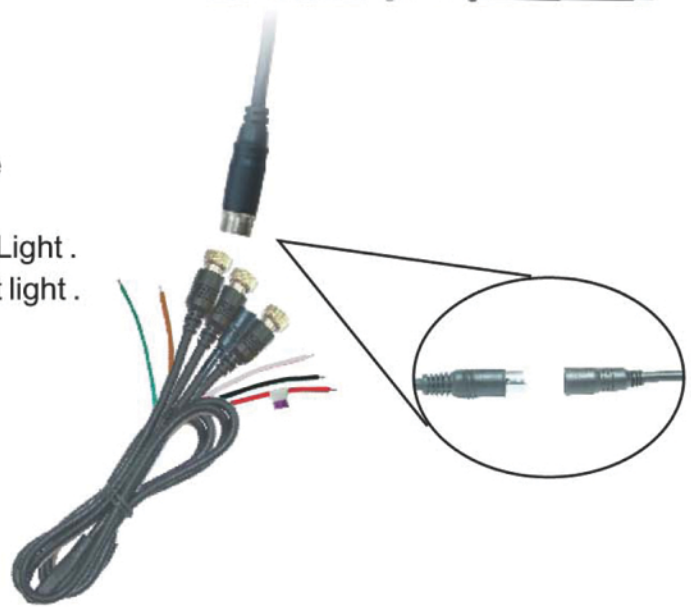

Black 13 pin male

Black 13 pin female

- Black 4 pin male for Camera 1 / Camera 2 / Camera 3.
- Single red wire for positive power supply of DC / 12-32V.
- Single black wire for GND.
- Single brown wire to positive power wire of back-up light .
- Single white wire to positive power wire of left turn light .
- Single blue wire to positive power wire of right turn light .

