




Installation Guide

Connection of AV Adapter and Controller Cable

Hold the cable , align the side of jack marked with ⇨ on the female 22-pin connector with the male 22-pin connector marked with ⇐ then firmly plug together.

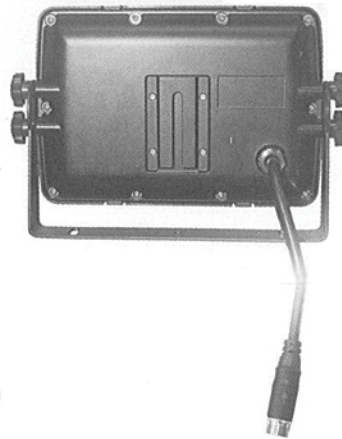

- ① Black 4 pin male for Camera 1.
- ② Black 4 pin male for Camera 2.
- ③ Black 4/5 pin male for Camera 3.
- ④ Black 4 pin male for Camera 4.
- ⑤ Single red wire to power wire of DC / 10-32V.
- ⑥ Single black wire to GND.
- ⑦ Single brown wire to positive power wire of the back-up light.
- ⑧ Single white wire to positive power wire of left light .
- ⑨ Single blue wire to positive power wire of right light .
- ⑩ Single green wire to any other trigger control.
- ⑪ Yellow RCA for video output
- ⑫ White RCA for audio output

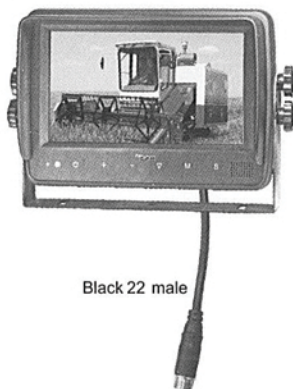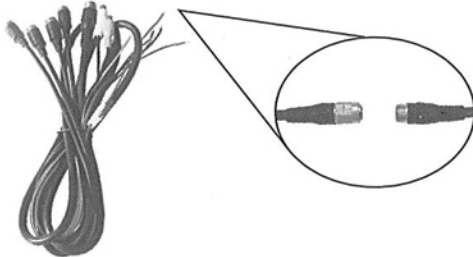

Black 22 male

Black 4/5 pin male for Camera 1 / Camera 2 / Camera 3 / Camera 4.
Single red wire to positive power supply of DC/10-32V.
Single black wire to GND.
Single brown wire to positive power wire of back-up light.
Single white wire to positive power wire of left light .
Single blue wire to positive power wire of right light .
Single green wire to any other trigger control.
Yellow RCA female for video output .
White RCA female for audio output.

